



Customer		
Customer Address	Delivery Address (if different)	Page _____ of _____
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	
LIST CODE		

DOOR STYLE

With Fixed panel(s)

INT320 Outer
INT230 (33mm transom)
INT310 Header
Header bars are cut full width

No Fixed panel(s)

Standard width given is the hole in wall width. Sash(es) will be 20mm wider than given width. Header bar will be double the width of the sash(es). Note on drawing if sash width needs to be different.

TOPRAIL

INT312

Head fix (no fixings supplied)
Face fix (L Brackets ACINT311)
Not available with fixed panels

Height is from bottom of sash to top of header bar. Customer to allow 4mm clearance to the bottom of the sash/fixed panel. Face fix L brackets are 40mm (not included in overall height)

SASH

INT320

TRANSOM

INT230 (33mm)

BEAD

INT270 (Square)

Width Splits

As indicated on drawing

Equal glass widths

Height Splits

Equal glass in door sash

Side panels to line through

Equal transom in doors

Side panels to line through

As indicated on drawing

Extra Item:

W20165 - 25m Astragal bar.

Supply 2 lengths per fixed panel

Length of each to be:

fixed panel width + 100mm

GLAZING

Glazed (Single 6mm clear Tough)

Unglazed

ITEM DETAILS

Item	Qty
Width	
Height	
Location	

EXTRUSION COLOUR

White Gloss (SA018E) <input type="checkbox"/>		
Grey Matt (RAL 7016) <input type="checkbox"/>	Other colour:	Finish
Black Matt (RAL 9005) <input type="checkbox"/>	Dual colour not available	
Customer Signature		

As Viewed:

- fixed sashes are on closest track.
- sliding sashes are on far track.
- beads facing away from you

Beads and slider this side



Viewed this side

Beads and slider this side




Viewed this side

Beads and slider this side



Viewed this side

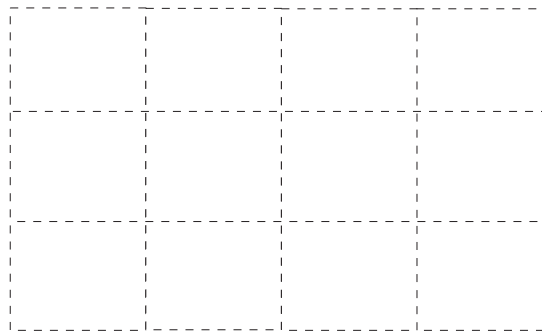

Notes:

HANDLE/COLOUR



Fingerpull

(Blue Perf.)

Satin Stainless Steel

Matt Black



Square Pull Handle

Satin Stainless Steel

Matt Black



Knurled Pull Handle

Black

Satin Brass

Satin Nickel

Chrome

Length mm

Extra Info

- 4mm gap between bottom of sash and Floor
- ACINT325 Guide Pin supplied loose to be fixed to the floor at the opposite side to the handle
- Handle pockets on both sashes
- No locking available.
- MINIMUM sash width: 400mm
- MAXIMUM sash width: 1200mm
- MAXIMUM sash height: 2500mm
- All orders are subject to our terms and conditions of sale which are available at: www.a-w-s.co.uk