



Customer		
Customer Address	Delivery Address (if different)	Page of
		Goods
		VAT
		Total
Contact	Delivery Method	Order Date
Tel	Despatch Route	Delivery Date
Fax	Customer Ref	
Email	Sales Contact	

OUTSIDE VIEW ONLY **LIST CODE**

OUTER FRAME	EXTERNAL COLOUR	INTERNAL COLOUR	WEATHER BAR
SPD702 62mm <input type="checkbox"/>	Door	Door	White <input type="checkbox"/> Silver <input type="checkbox"/>
SPD701 78mm <input type="checkbox"/>	Frame	Frame	Black <input type="checkbox"/> Match <input type="checkbox"/>

THRESHOLD	ITEM DETAILS	Location
Low SPD 703	Item	
Full width <input type="checkbox"/>	Qty	
Std width <input type="checkbox"/>	Width	Door Type
Outer Frame <input type="checkbox"/>	Height	ALL DOORS ARE OPEN IN

CILL

None

150mm (ETC457)

190mm (ETC458)

225mm (ETC479)

Use SPD750 infill with a cill

ADD-ON - 20mm

Head

Locking Jamb

Hinge Jamb

Add-on recommended down hinge side of SPD702 outer as there is only 10mm clearance on the hinge

LOCK

ACPD681 10 Point Lock

ACPD670 Slam Lock

Cylinder

Key/Key

Key/Thumb

Select from one section only

a - Escutcheon Fingerpull

Both sides Out (Flush to inside)

S/Steel

Graphite

or

b - Flush Mounted Escutcheon

S/Steel

Chrome

EXTERNAL HANDLE

None

As Below

.....

.....

INTERNAL HANDLE


None

As Below

.....

.....

Overall sizes to include cills and add-ons (transom, mullion and midrail sizes are excluding cills and add-ons).
All couplers are deducted from frame and toplight

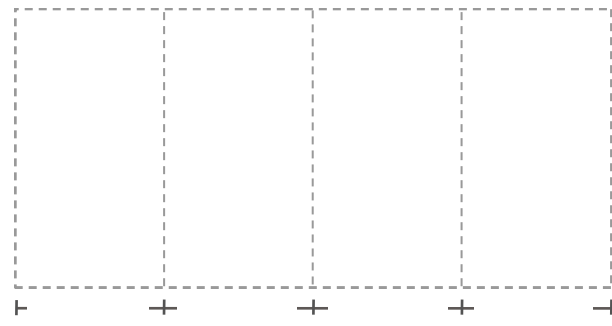

Door, toplight and side frames are fabricated separately

HINGE COLOUR

Black

White

To Match Door

To Match Frame

LETTERPLATE

Yes

Colour.....

Code.....

Position.....

EXTRA HARDWARE

.....


.....

.....

Note to sales, please check compatibility of sizes / locks / outer using online Door Designer, especially with SPD701.

NOTES

For installation guidance please visit:
<https://www.smartsystems.co.uk/installdesignerdoors>

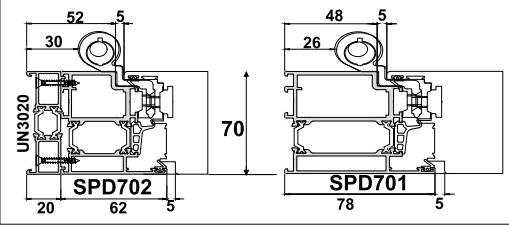

Side Frame Fixed Only

Internally Glazed Option ETC4011 (47mm Face)

ETC4031 (Transom 62mm Face) Midrail match not available

Externally Glazed Option ETC4111 (Ext glazed)

Transom/Mullion for ETC4110

ETC4130 (57mm)

ETC639 (109mm)

Operner - Alitherm 400

ETC4111 Outer

ETC4129 Int Glazed

ETC4120 Ext Glazed

Coupler (Vertical)

UN3015 (70 x 15mm)

ETC357 (76 x 25mm)

Load Bearing (24mm) inc Bay Jacks

UN3015 coupler will be used unless ix value required is too great.

Coupler (Horizontal Drained)

UN3000 (70 x 15mm)

GLAZING - DOOR (TRIPLE GLAZED)

Planitherm Total+ Argon, Toughened

Diffused Lami as standard (middle pane)

Clear (not available on all doors)

GLAZING - SIDE PANEL/TOPLIGHT

Clear Double Glazed as standard Planitherm Total+ Argon, Toughened

Triple Glazed

Diffused Laminate

Satin

Unglazed

Double glazed will be satin/dif lam to outside Triple will be satin/dif lam to middle pane

TERMS AND CONDITIONS

Allstyle Doors are inspected and photographed before being packaged

The packaging has a "Shock Dot" - if a colour is visible, do not accept delivery and notify your sales contact immediately.

The door MUST be inspected on, or as soon after, delivery as possible. Any damage must be reported within 36 hours of delivery, accompanied by photographic or video evidence.

If there is any damage DO NOT install the door.

Once the order has been placed, alterations will not be possible. Please check the order requirements carefully.

Full terms and conditions can be found on our website www.a-w-s.co.uk.

© AAS AED OCT24